

MODEL **519** **CONDENSATE PUMP**

Removes
condensation from
air conditioning
equipment,
condensing furnaces,
dehumidifiers, ice
makers, water coolers and
refrigeration systems



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.




» FEATURES & BENEFITS

- Treats condensate at temperatures up to 60°C (140°F)
- 20 ft (6.1 m) HMT
- Wall mount
- Four input options
- 3/8 in (9 mm) discharge
- Stainless steel shaft
- Built-in safety switch and check valve
- 6' (1.8 m) power cord with grounding
- Equipped with thermal protection

» PERFORMANCE

THE ZOELLER WAY: Every pump manufactured by Zoeller is 100% tested before leaving our facility to ensure out-of-the-box reliability.

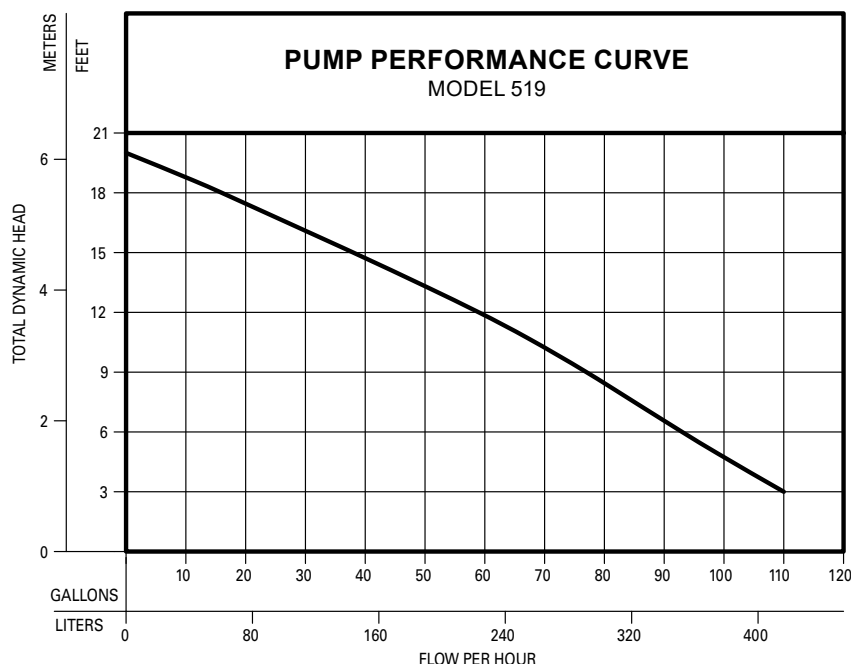

TOTAL DYNAMIC HEAD/FLOW PER HOUR
CONDENSATE

MODEL		519	
Feet	Meters	Gal.	Liters
3	.9	110	416
6	1.8	93	352
9	2.7	77	291
12	3.7	59	223
15	4.6	38	144
18	5.5	16	61
Shut-off Head:		20 ft.(6.1m)	

SK858

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

FM3094
0826
Supersedes
0524