ZOELLER®
PUMP COMPANY
zoellerpumps.com

ProPak™ SYSTEMS

Self-Testing Battery Backup Systems for Dependable Protection



Pre-piped Combination Battery Backup & Primary Pump Systems

Factory assembled with 1-1/2" schedule 40 PVC pipe 7 fittings

ProPak™ AquaNot® Fit 508

100% FACTORY TESTED

Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.

FAMILY OWNED AMERICAN PROUD™

ProPak™ SYSTEMS

ZOELLER® PUMP COMPANY

ProPak™ AquaNot® Fit 508

Preassembled, self-testing Battery Backup System with Primary Sump Pump. Equipped with Z Control Cloud Technology and built-in Wi-Fi.



Model 508/M53®, M63 or M98 - Z Control® Enabled

- 508 pump rated 2,040 GPH @ 10'
- M53®/63 pump rated 2,040 GPH @ 10'
- M98 pump rated 3,660 GPH @ 10'
- All primary pumps with this system include the Zoeller LED Plug that allows you to check for power at a quick glance.
- Self-testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/ controller with alarm, light indicator and warning system
- Two independent, supervised switches
  - Heavy duty mechanical operating switch
  - High water sensor with alarm and pump run redundancy
- 3-year limited warranty on system with Models 53® and 98 pumps
- 5-year limited warranty on system with Model 63 pump
- Built in Wi-Fi

ProPak™ AquaNot® Spin 508

Preassembled, self-testing Battery Backup System with Primary Sump Pump.



Model 508/M53® and M98

- 508 pump rated 2,040 GPH @ 10'
- M53® pump rated 2,040 GPH @ 10'
- M 98 pump rated 3,660 GPH @ 10'
- All primary pumps with this system include the Zoeller LED Plug that allows you to check for power at a quick glance.
- Self-testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/ controller with alarm, light indicator and warning system
- Heavy duty mechanical operating switch
- Optional - High water sensor with alarm and pump run redundancy
- 3-year limited warranty



Z Control®

FREE Z Control® access:
- Email, text, and push notifications
- Remote monitoring and control

Google Play | App Store

Search: "Z Control"

PROPAK ITEM	CONTROLLER	AC PUMP			Z CONTROL®
		M53®	M98	M63	
508-0006	Aquanot® Spin	X			
508-0007	Aquanot® Spin		X		
508-0015	Aquanot® Fit	X			X
508-0016	Aquanot® Fit		X		X
508-0020	Aquanot® Fit			X	X

See **FM2778** (Model 53®), **FM2899** (Model 63) or **FM2779** (Model 98) for complete pump specifications.


» PERFORMANCE

DC PUMPS @ 12.7 VOLTS

MODEL		508	
Feet	Meters	Gal	Liters
5	1.5	41	155
10	3.0	34	129
15	4.6	26	98
Shut-off Head		22 ft. (6.7 m)	

NOTE: Above performance chart based upon actual performance achieved with a 12 Volt deep-cycle battery. Some manufacturers publish performance data based upon D.C. Pump testing according to Marine Industry standards which can reflect a performance of 40% - 80% higher than actual battery powered performance.

AC PUMPS

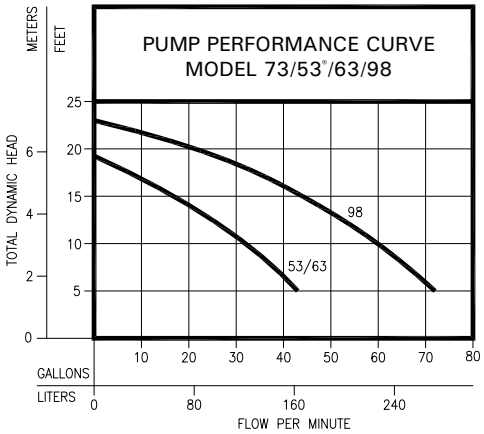

TOTAL DYNAMIC HEAD/ FLOW PER MINUTE
SUMP AND DEWATERING

MODEL		53/63		98	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	43	163	72	273
10	3.0	34	129	61	231
15	4.6	19	72	45	170
20	7.1	--	--	25	95
Shut-off Head:		19.25 ft. (5.9 m)		23 ft. (7.0 m)	

⚠ CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

© Copyright Zoeller® Co. All rights reserved.