

MODEL **522**

LOW PROFILE CONDENSATE PUMP

Removes
condensation from
air conditioning
equipment,
condensing furnaces,
dehumidifiers, ice
makers, water coolers and
refrigeration systems



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.




» FEATURES & BENEFITS

- Handles condensate up to 140 °F (60 °C)
- 20 ft (6.1 m) TDH
- Wall mounts
- Two inlet options
- 3/8" Discharge
- Stainless steel shaft
- Built-in safety switch and check valve
- 6 ft power cord with ground
- Thermally protected

» PERFORMANCE

THE ZOELLER WAY: Every pump manufactured by Zoeller is 100% tested before leaving our facility to ensure out-of-the-box reliability.

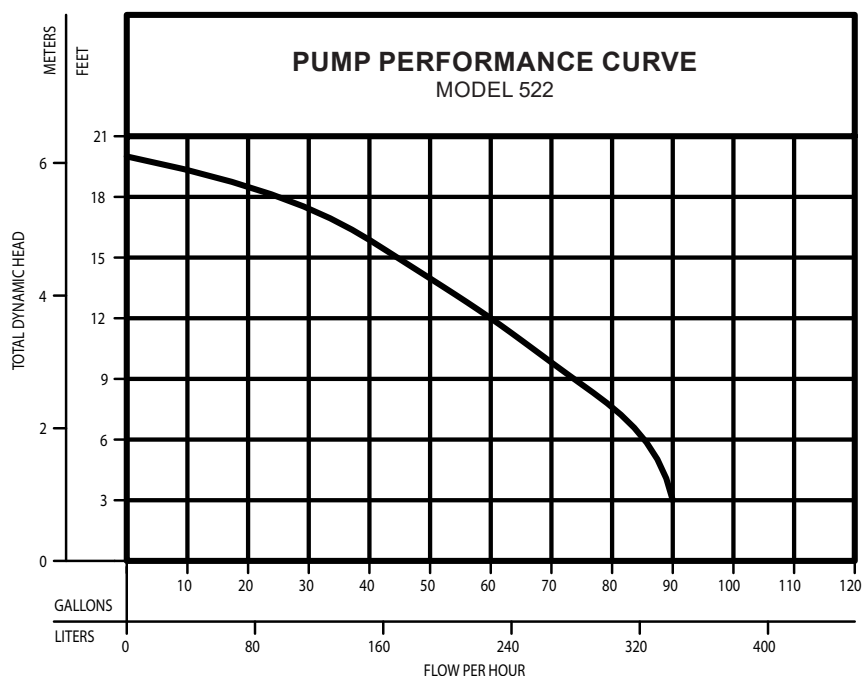

TOTAL DYNAMIC HEAD/FLOW PER HOUR
CONDENSATE

MODEL		522	
Feet	Meters	Gal.	Liters
3	.9	90	341
6	1.8	85	322
9	2.7	72	273
12	3.7	60	227
15	4.6	44	167
18	5.5	26	98
Shut-off Head:		20 ft.(6.1m)	

155802

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

FM3266
0826
Supersedes
0524