

EXPLOSION PROOF SERIES

Commerical Effluent and Sewage Pumps

Effluent or Sewage
submersible pumps rated for
Class 1, Division 1, Groups
C & D or Class 2, Division 1,
Groups E, F & G



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.



» FEATURES



- Durable, cast iron constructed switch case, base, motor and pump housing
- Non-clogging vortex impeller design
- Rated for Gas or Dust environments
 - Gas - Class 1, Division 1, Groups C & D and Class 1, Zone 1, Groups IIA & IIB
 - Dust - Class 2, Division 1, Groups E, F & G and Zone 20
- Industries ONLY Automatic units available
- 25' power cord with optional 50' cord available
- 3450 RPM, 60 Hz
- Double shaft seal
- 1 year limited warranty

Tech Data Reference	
X4160 Series	FM3516
X4180 Series	FM3515
X4290 Series	FM3517

Pump Models				
Model	HP	Voltage	Phase	FLA
MX4161	1/2	115	1	15.0
NX4161	1/2	115	1	15.0
MX4163	1/2	115	1	15.0
NX4163	1/2	115	1	15.0
GX4188	1-1/2	460	3	4.6
GX4189	2	460	3	6.0
MX4292	1/2	115	1	15.0
NX4292	1/2	115	1	15.0
DX4294	1-1/2	230	1	13.7
EX4294	1-1/2	230	1	13.7
JX4294	1-1/2	200	3	10.8
GX4294	1-1/2	460	3	4.8
DX4295	2	230	1	17.1
EX4295	2	230	1	17.1
JX4295	2	200	3	14.3
FX4295	2	230	3	12.2
GX4295	2	460	3	6.1

» PERFORMANCE

THE ZOELLER WAY: Every pump manufactured by Zoeller is 100% tested before leaving our facility to ensure out-of-the-box reliability.

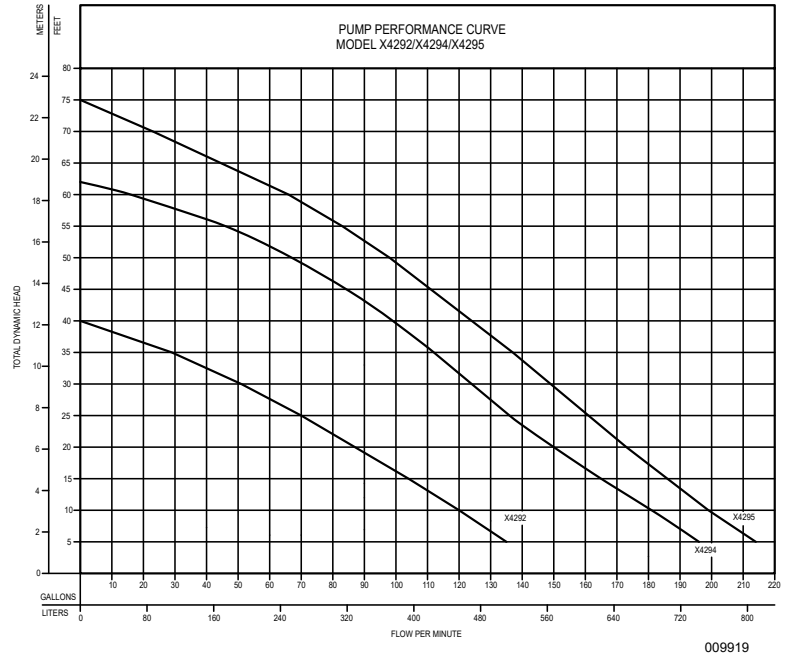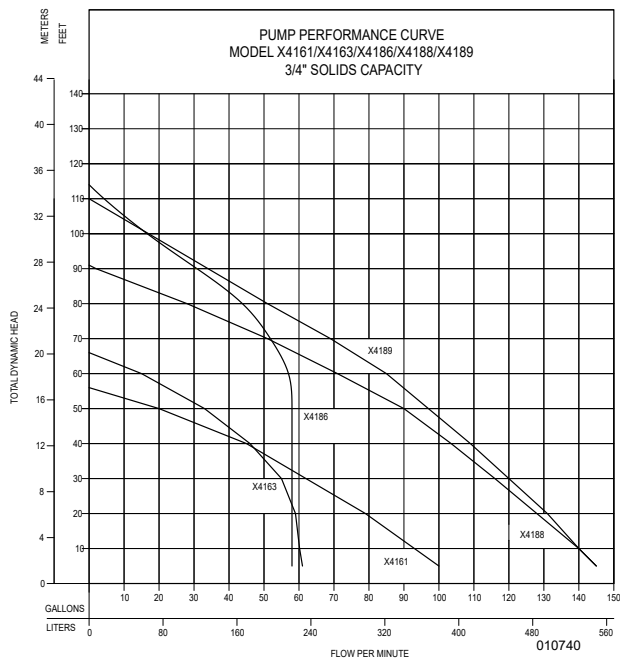

CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).



Tested to Standard
UL778 and
Certified to CSA
Standard C22.2 No. 108

FM3915
0526
Supersedes
0824