



**WASTE-MATE™**

**MODEL**

**267**

Submersible Sewage or Dewatering Pump

2" solids-passing  
pump with vortex  
impeller for added  
reliability.



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.



## » FEATURES & BENEFITS


- 1 or 3 phase
- 1/2 HP 115-460 V
- Performance up to 21.5'
- Flows up to 128 GPM
- All cast iron pump construction
- Non-clogging vortex impeller
- Corrosion-resistant, powder coated epoxy paint

Note: For additional pump specifications, refer to technical data sheet FM2780.

## » PERFORMANCE

**THE ZOELLER WAY:** Every pump manufactured by Zoeller is 100% tested before leaving our facility to ensure out-of-the-box reliability.

**100%**  
FACTORY TESTED

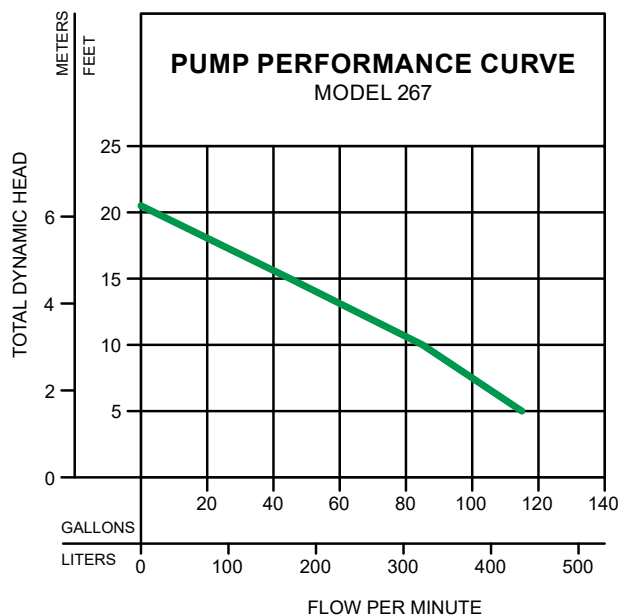

TOTAL DYNAMIC HEAD/FLOW PER MINUTE

MODEL		267	
Feet	Meters	Gal.	Liters
5	1.5	115	435
10	3.0	85	322
15	4.6	45	170
Shut-off Head:		20.5 ft.(6.2m)	

013225

DIMENSIONAL DRAWING

