

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

TECHNICAL DATA SHEET

Model 522 Low Profile Multi-Purpose Condensate Pump Series

Automatically removes condensation from air conditioning and 90+ condensing furnaces as well as dehumidifiers, ice makers, water coolers and refrigeration systems.


PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/30
	Voltage	115
	Phase	1
PUMP	Operation	Automatic
	Discharge Size	3/8"
	Cord Length	6 ft (2m)
	Cord Type	Grounded plug
	Max. Head	20' (6.1 m)
	Max. Flow Rate	90 GPH (340 LPH)
	Max. Operating Temp.	140 °F (60 °C)


- Handles condensate up to 140 °F (60 °C)
- 20 ft (6.1 m) TDH
- Dimensions: 5"(12.7 cm)x5.1"(12.9cm)x12(30.5 cm)
- 1/4 gallon (1 liter) capacity
- Built-in safety switch and check valve
- Will automatically shut pump down in event of failure
- Safety switch leads
- Two inlet options
- Option available to include 20' of 3/8" clear tubing

TOTAL DYNAMIC HEAD FLOW PER HOUR

MODEL		522	
Feet	Meters	Gal.	Liters
3	.9	90	341
6	1.8	85	322
9	2.7	72	273
12	3.7	60	227
15	4.6	44	167
18	5.5	26	98
Shut-off Head:		20 ft.(6.1m)	

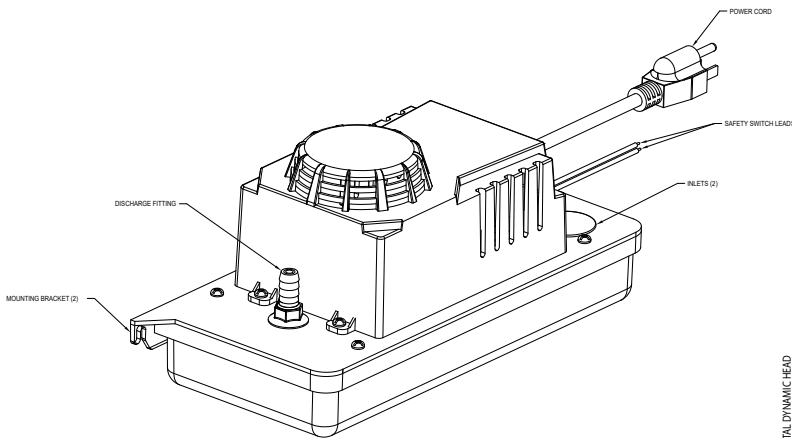

SK3173

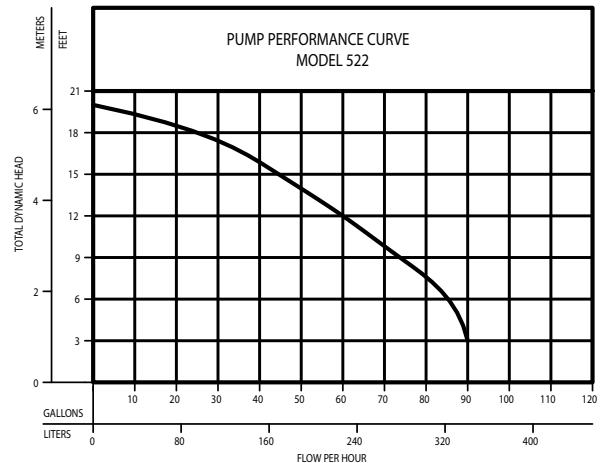

Tested to UL Standard UL778
& Certified to CSA
Standard C22.2 No. 108

155802