



MODEL 522

Low Profile Condensate Pump

Removes condensation from air conditioning equipment, condensing furnaces, dehumidifiers, ice makers, water coolers and refrigeration systems.




Features:

- Handles condensate up to 140 °F (60 °C)
- 20 ft (6.1 m) TDH
- Wall mounts
- Two inlet options
- 3/8" Discharge
- Stainless steel shaft
- Built-in safety switch and check valve
- 6 ft power cord with ground
- Thermally protected

100% factory tested

TOTAL DYNAMIC HEAD FLOW PER HOUR

MODEL		522	
Feet	Meters	Gal.	Liters
3	.9	90	341
6	1.8	85	322
9	2.7	72	273
12	3.7	60	227
15	4.6	44	167
18	5.5	26	98
Shut-off Head:		20 ft.(6.1m)	

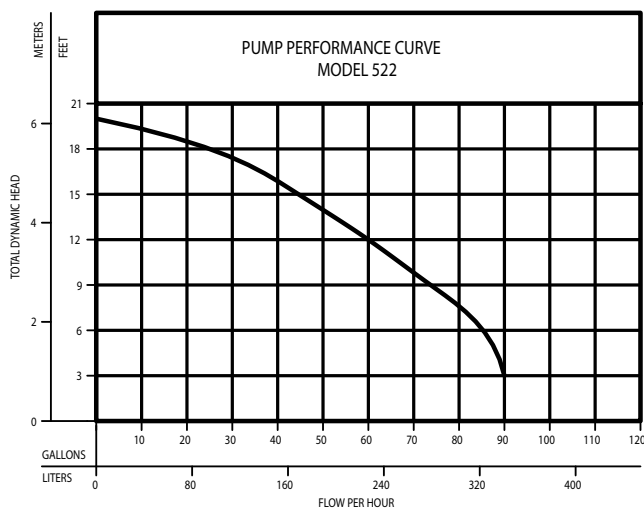

FM3266
0224
Supersedes
0123

CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).