

EXPLOSION PROOF SERIES

Commerical Effluent
and Sewage Pumps



MX4161



NX4292

Effluent or Sewage submersible pumps rated
for Class 1, Division 1, Groups C & D or Class
2, Division 1, Groups E, F & G



Zoeller Family of Water Solutions™

Copyright Zoeller Co. All rights reserved.

Features

- Durable, cast iron constructed switch case, base, motor and pump housing
- Non-clogging vortex impeller design
- Rated for Gas or Dust environments
 - Gas - Class 1, Division 1, Groups C & D and Class 1, Zone 1, Groups IIA & IIB
 - Dust - Class 2, Division 1, Groups E, F & G and Zone 20
- Industries ONLY Automatic units available
- 25' power cord with optional 50' cord available
- 3450 RPM, 60 Hz
- Double shaft seal
- 1 year limited warranty



100% factory tested



Tested to Standard
UL778 and
Certified to CSA
Standard C22.2 No. 108

Pump Models				
Model	HP	Voltage	Phase	FLA
MX4161	1/2	115	1	15.0
NX4161	1/2	115	1	15.0
MX4163	1/2	115	1	15.0
NX4163	1/2	115	1	15.0
GX4188	1-1/2	460	3	4.6
GX4189	2	460	3	6.0
MX4292	1/2	115	1	15.0
NX4292	1/2	115	1	15.0
DX4294	1-1/2	230	1	13.7
EX4294	1-1/2	230	1	13.7
JX4294	1-1/2	200	3	10.8
GX4294	1-1/2	460	3	4.8
DX4295	2	230	1	17.1
EX4295	2	230	1	17.1
JX4295	2	200	3	14.3
FX4295	2	230	3	12.2
GX4295	2	460	3	6.1

Tech Data Reference	
X4160 Series	FM3516
X4180 Series	FM3515
X4290 Series	FM3517

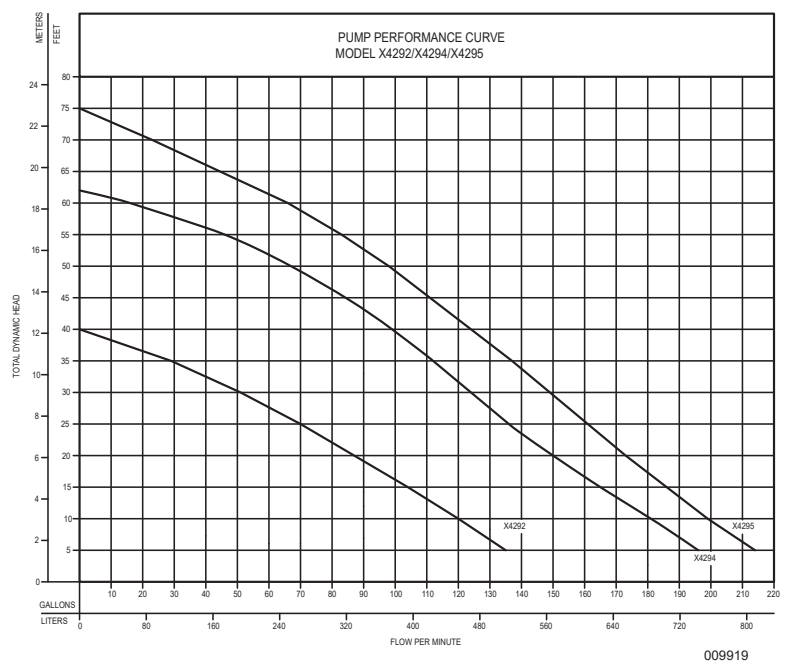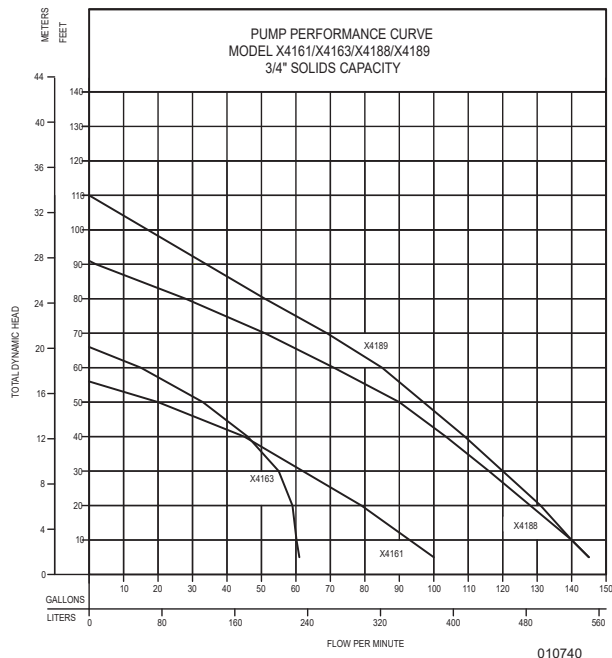

FM3915
0824
Supersedes
NEW



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).