

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

PREASSEMBLED SUMP PUMP SYSTEMS 900 SERIES

Job ready for a fast and easy installation.
No assembly required - Drop it in the hole and go!

900 Preassembled Sump Pump System Includes:

Preassembled:

- Pump switch is installed 180° from inlet.
- Discharge pipe is plumbed with a predrilled 3/16" vent hole.
- Electrical cord seal is installed in cover.
- Cover is sealed and bolted down.
- Basin is filled with environmentally safe peanuts for safe transit - just add water and they dissolve!
- Automatic cast iron pump with thermoplastic base and stainless steel hardware supplied with tank and all other hardware.
- 18" X 22" basin with 4" inlet
- Deluxe unit has a radon-approved basin and cover for radon prevention.
- Standard model uses a polyethylene basin and cover.
- Deluxe cover has a 3" vent, 1-1/2" discharge.
- Standard cover has a 2" vent, 1-1/2" discharge.
- Fast, easy and job ready!

53-0001 pump includes contractor approved Zoeller LED Plug.

All pump models are completely submersible and hermetically sealed, as well as watertight and dust tight with permanently oiled bearings.






MIGHTY  PAK

SUMP PUMP SERIES	MODEL PUMP WITH BASIN	SYSTEM TYPE	SYSTEM WEIGHT
900-0001	M53*	DELUXE	48 LBS.
900-0002	M53*	STANDARD	53 LBS.


* Pump powered by  Zoeller Motor Works motor

DELUXE & STANDARD SYSTEMS
(Model M53 Pump)

- Automatic, float operated mechanical switch
- 115 V/1 Ph., 60 Hz.
- 9 ft. (2.7m) UL Listed 3-wire cord and Zoeller LED Plug
- Stainless steel screws, guard, handle and switch arm
- Passes 1/2" spherical solids
- 1-1/2" NPT discharge
- 1550 RPM
- Non-clogging vortex impeller
- Glass-filled polypropylene base with built-in strainer
- Temperature rated 130 °F (54 °C)
- cCSAus listed pump

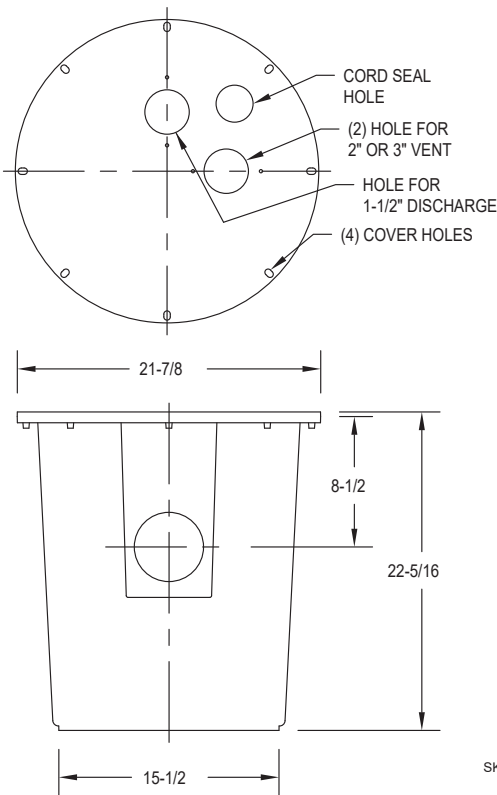

SK2297

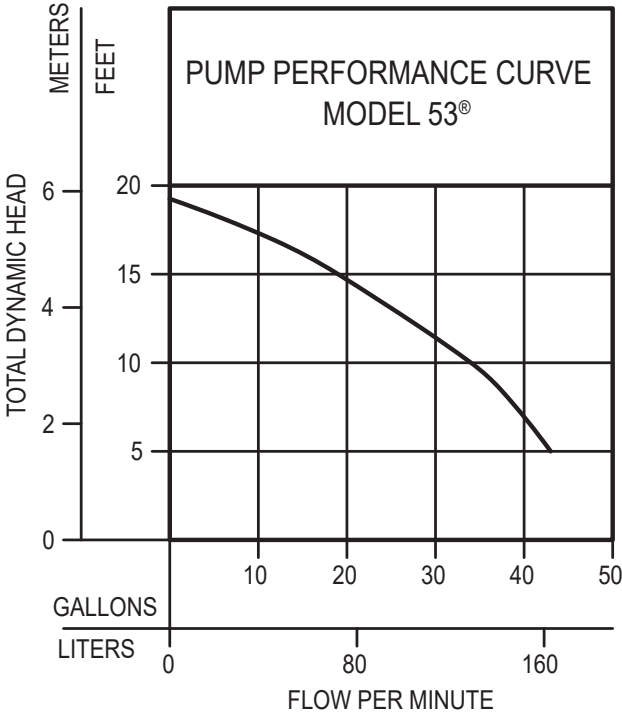

009897

**TOTAL DYNAMIC HEAD/FLOW
PER MINUTE
EFFLUENT AND DEWATERING**

MODEL		53	
Feet	Meters	Gal.	Liters
5	1.5	43	163
10	3.0	34	129
15	4.6	19	72
Shut-off Head:		19.25 ft.(5.9m)	

009897

JOB READY FOR EASY INSTALLATION

 **WARNING** TO REDUCE THE RISK OF ELECTRICAL SHOCK A PROPERLY GROUNDED RECEPTACLE OF GROUNDING TYPE SHALL BE INSTALLED AND PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI) IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND LOCAL CODES. DO NOT REMOVE GROUND PIN FROM PLUG.

RESERVE POWERED DESIGN

For unusual conditions a reserve safety factor is engineered into the design of every Zoeller pump.