

TOUGHER.  
STRONGER.  
BETTER.  
**ZOELLER.**



**MEET  
THE NEW  
MODEL 73.**

**ZOELLER**   
PUMP COMPANY



LEARN MORE

# MODEL 73




## » FEATURES & BENEFITS

- 1/3 HP, oil-filled motor and cast-iron motor housing for optimal heat dissipation
- Powder-coated epoxy finish provides corrosion-resistance and extends the life of the pump
- Industry proven snap action switch makes for an easy installation.
- Solid, polypropylene float eliminates the possibility of water infiltration allowing the float to remain buoyant and functional at all times.
- Best Accessories: Check Valve, Pump Stand, Sump Basin



## » PERFORMANCE

**THE ZOELLER WAY:** Every pump is submerged in water and tested to its published performance curve, delivering peace of mind right out of the box.

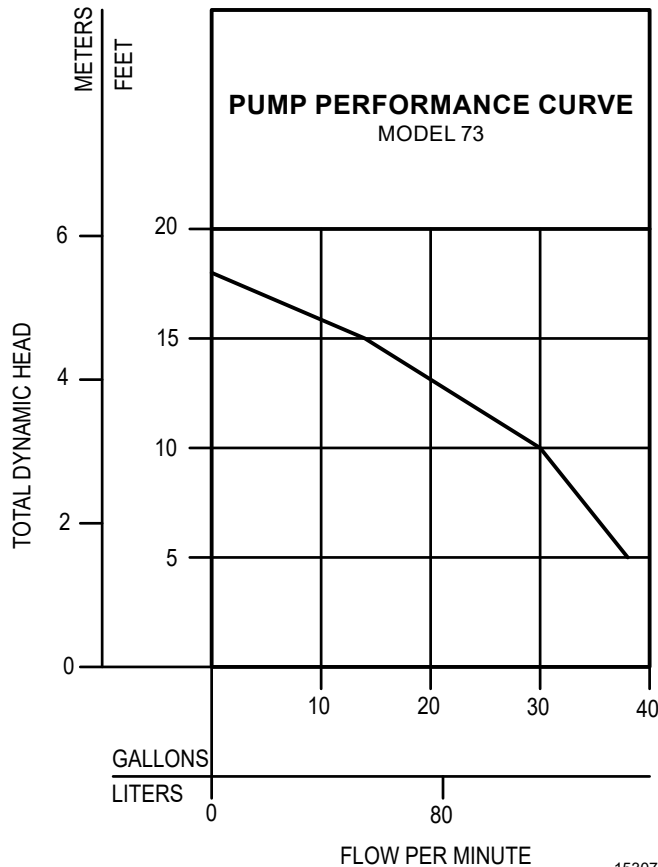

TOTAL DYNAMIC HEAD/FLOW PER MINUTE

MODEL		73	
Feet	Meters	Gal.	Liters
5	1.5	38	144
10	3.0	30	114
15	4.6	14	53
Shut-off Head:		18 ft. (5.5 m)	



» FOR MORE INFORMATION

See tech data sheet FM2897

153077



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.

FM2960  
0326  
Supersedes  
0226