

# **MODEL** **802**

## **1/2 HP GRINDER PUMP**

For Demanding Sewage Ejector Applications


An economic upgrade  
from a traditional  
sewage pump to a  
grinder pump



Trusted. Tested. Tough.®

© Copyright 2026 Zoeller® Co. All rights reserved.



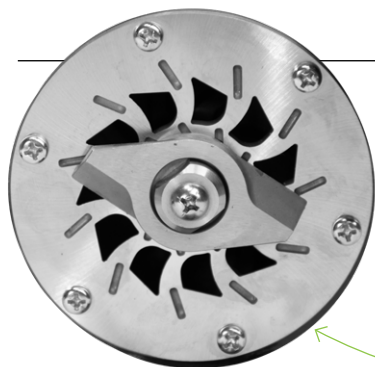


## « FEATURES & BENEFITS

- A 115 V grinder for residential use without commercial grinder costs
- Performance up to 29.5' TDH
- Includes an LED plug — Power You Can See
- Industry-proven automatic switch for dependable operation
- Proven Tri Slice® Cutter Technology for unmatched durability

## » PERFORMANCE

**THE ZOELLER WAY:** Every pump is submerged in water and tested to its published performance curve, delivering peace of mind right out of the box.

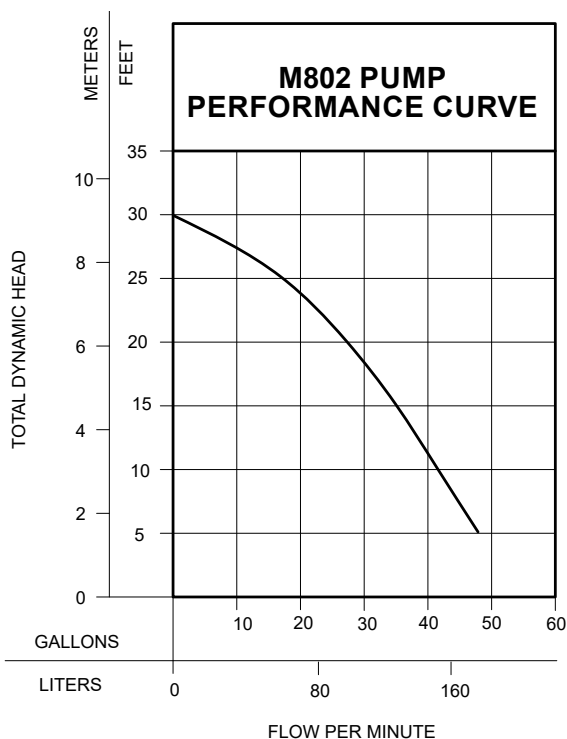

**TOTAL DYNAMIC HEAD/  
CAPACITY PER MINUTE**

MODEL		802	
Feet	Meter	Gal.	Liters
5	1.5	48	182
10	3.0	41	155
15	4.6	35	132
20	6.1	27	102
25	7.6	17	64
Shut-off Head:		29.5 ft.	9.0m

159400



Certified to CSA  
Standard C22.2  
No. 108.



NSF / ANSI 46

