

MODEL 73

SUBMERSIBLE DEWATERING PUMP

Trusted. Tested. Tough.*



PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/3
	Voltage	115
	Phase	1
	Hertz	60
	RPM	3450
	Type	Permanent Split Capacitor Motor / Class B
PUMP	Operation	Automatic
	Auto On/Off Points	7-1/4" / 3"
	Discharge Size	1-1/2" NPT
	Solids Handling	1/2"
	Cord Length	9'
	Max Performance	19.25' / 43 GPM @ 5'
	Max. Operating Temp.	130° F
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload
MATERIALS	CAP	Thermoplastic
	Motor Housing	Cast iron
	Pump Housing	Cast iron
	Base	Thermoplastic
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller	Thermoplastic vortex
	Hardware	Stainless steel
	Motor Shaft	AISI 1215 cold rolled steel
	Gasket	Neoprene

APPLICATIONS

- Basement Sump


MODEL 73



ACCESSORIES



PUMP PERFORMANCE CURVE

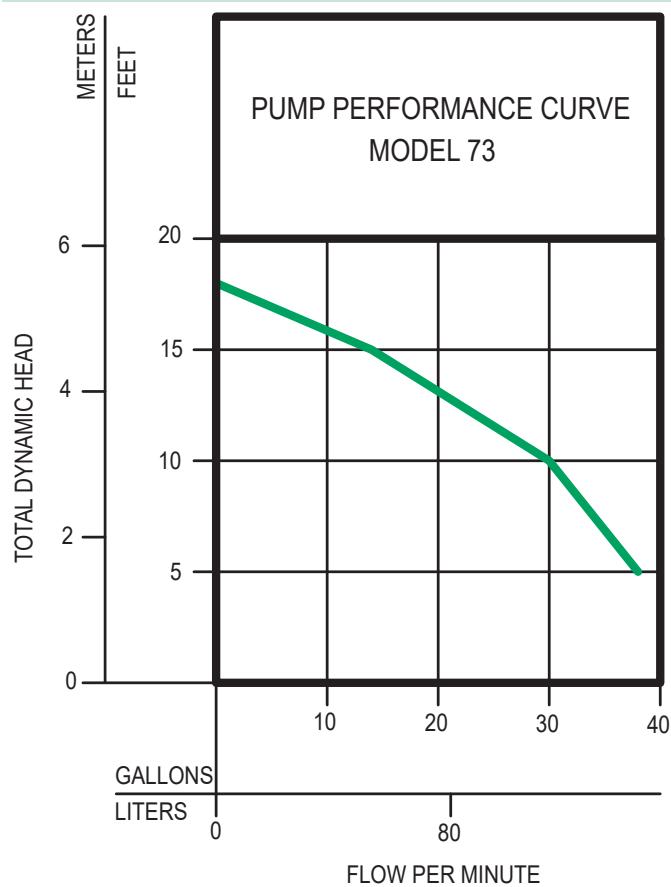

TOTAL DYNAMIC HEAD FLOW PER MINUTE

MODEL		73	
Feet	Meters	Gal.	Liters
5	1.5	38	144
10	3.0	30	114
15	4.6	14	53
Shut-off Head:		18 ft. (5.5 m)	

PUMP SPECIFICATIONS

Model	Mode	Volts	Ph	Amps	Lbs.	Controls
M73	Auto	115	1	5.5	23	Integral float-operated mechanical switch

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

SECTION: 2.15.034

FM2897

0226

Supersedes

0825

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

© Copyright 2026 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com