

MODEL 73

SUBMERSIBLE DEWATERING PUMP

Trusted. Tested. Tough.



PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/3
	Voltage	115
	Phase	1
	Hertz	60
	RPM	3450
	Type	Permanent Split Capacitor Motor / Class B
PUMP	Operation	Automatic
	Pump Dimensions	Height- 12-3/32", Width- 9-25/32"
	Auto On/Off Points	7-1/4" / 3"
	Discharge Size	1-1/2" NPT
	Solids Handling	1/2"
	Cord Length	9'
	Max Performance	18' / 38 GPM @ 5'
	Max. Operating Temp.	130° F
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload
	CAP	Thermoplastic
	MATERIALS	Motor Housing
Pump Housing		Cast iron
Base		Thermoplastic
Upper Bearing		Ball bearing
Lower Bearing		Ball bearing
Mechanical Seals		Carbon and ceramic
Impeller		Thermoplastic vortex
Hardware		Stainless steel
Motor Shaft		AISI 1215 cold rolled steel
Gasket		Neoprene

MODEL 73



ACCESSORIES



30-0181



10-2421



507-0005



10-1450

APPLICATIONS

- Basement Sump




© Copyright 2026 Zoeller® Co. All rights reserved.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347 | SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961

PUMP PERFORMANCE CURVE

TOTAL DYNAMIC HEAD FLOW PER MINUTE

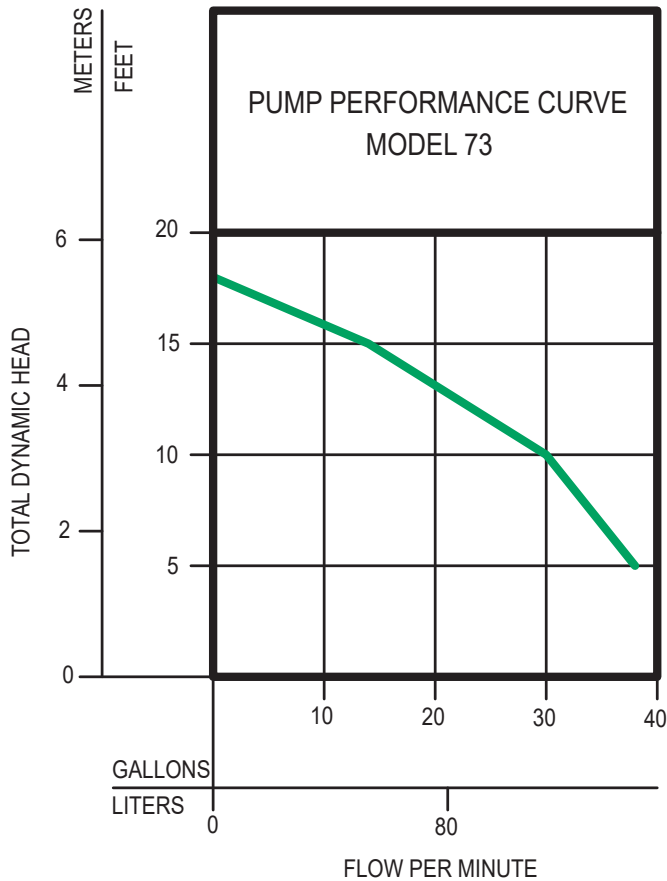

MODEL		73	
Feet	Meters	Gal.	Liters
5	1.5	38	144
10	3.0	30	114
15	4.6	14	53
Shut-off Head:		18 ft. (5.5 m)	

153077

PUMP SPECIFICATIONS

Model	Mode	Volts	Ph	Amps	Lbs.	Controls
M73	Auto	115	1	5.5	23	Integral float-operated mechanical switch

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

SECTION: 2.15.034

FM2897

0226

Supersedes

0825

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

© Copyright 2026 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com