

MODEL 267

SEWAGE / EFFLUENT OR DEWATERING PUMPS

Trusted. Tested. Tough



TECHNICAL DATA SHEET

PRODUCT SPECIFICATIONS

MODEL 267

MOTOR	Horse Power	1/2
	Voltage	115 - 460
	Phase	1 or 3 Ph
	Hertz	60 Hz
	RPM	1725
	Type	Permanent split capacitor / Class B
PUMP	Operation	Automatic or nonautomatic
	Auto On/Off Points	12" / 4"
	Discharge Size	2" NPT
	Solids Handling	2" spherical solids
	Cord Length	10' automatic or 15' nonautomatic
	Cord Type	UL listed neoprene cord and plug
	Max Performance	20.5' / 115 GPM @ 5'
	Max. Operating Temp.	130° F
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload (1 Ph)
MATERIALS	Cap	Cast iron
	Motor Housing	Cast iron
	Pump Housing	Cast iron
	Base	Cast iron
	Upper Bearing	Sleeve bearing
	Lower Bearing	Sleeve bearing
	Mechanical Seals	Carbon and ceramic
	Impeller	Thermoplastic vortex
	Hardware	Stainless steel
	Motor Shaft	AISI 1215 cold rolled steel
	Gasket	Neoprene



Min. Basin Size- Simplex: 18" x 30"
Duplex: 30" x 36"

APPLICATIONS

- Residential sewage
- Light commercial sewage
- Dewatering

ACCESSORIES



30-0042



30-0048



912-1143




10-4012



© Copyright 2026 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com

PUMP PERFORMANCE CURVE

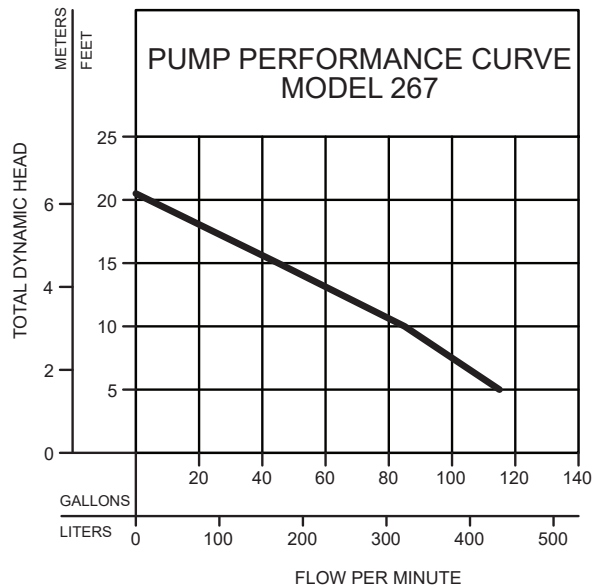

TOTAL DYNAMIC HEAD FLOW PER MINUTE

MODEL		267	
Feet	Meters	Gal.	Liters
5	1.5	115	435
10	3.0	85	322
15	4.6	45	170
Shut-off Head:		20.5 ft.(6.2m)	

013225

MODEL COMPARISON												CERTIFICATIONS
Model	Seal	Mode	Volts	Ph	Amps	HP	Hz	Lbs	Kg	Simplex	Duplex	cCSAus
M267/BN267	Single	Auto	115	1	9.4	1/2	60	47.5	22	1	4	Y
N267	Single	Non	115	1	9.4	1/2	60	47.5	22	2 or 3	3 or 4	Y
D267/BE267	Single	Auto	230	1	4.7	1/2	60	47.5	22	1	---	Y
E267	Single	Non	230	1	4.7	1/2	60	47.5	22	2 or 3	3 or 4	Y
H267	Single	Auto	200-208	1	6.2	1/2	60	47.5	22	1	---	Y
I267	Single	Non	200-208	1	6.2	1/2	60	47.5	22	3	3 or 4	Y
J267	Single	Non	200-208	3	3.6	1/2	60	47.5	22	3	3 or 4	Y
F267	Single	Non	230	3	3.3	1/2	60	47.5	22	3	3 or 4	Y
G267	Single	Non	460	3	2.0	1/2	60	47.5	22	3	3 or 4	Y

SELECTION GUIDE

1. Integral float operated mechanical switch, no external control required.
2. For automatic use single piggyback variable level float switch or double piggyback variable level float switch. Refer to FM0477.
3. See FM3459 for simplex or duplex panel selection.
4. FM1663 for a residential alternator system.



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

© Copyright 2026 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com

SECTION: 2.20.030

FM2789

0626

Supersedes

1025