

MODEL 912

PREASSEMBLED SEWAGE SYSTEMS FOR FAST INSTALLATION

Trusted. Tested. Tough



TECHNICAL DATA SHEET

PRODUCT SPECIFICATIONS

MOTOR	Horse Power	0.4 & 0.5
	Voltage	115
	Phase	1
	Hertz	60
	RPM	1725
	Amps	9.4
PUMP	Auto On/Off	Varies based on package
	Discharge Size	2" NPT
	Solids Handling	2" (50 mm) spherical solids
	Cord Length	15' (6 m) standard
	Cord Type	UL listed 3-wired plug
	Max. Operating Temp.	130 °F (54 °C)
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload
MATERIALS	Cap	Cast iron
	Motor Housing	Cast iron
	Pump Housing	Cast iron
	Base	Engineered plastic
	Upper Bearing	Sleeve bearing
	Lower Bearing	Sleeve bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	AISI 1215 cold rolled steel
	Gasket	Neoprene

APPLICATIONS

- Residential Basements
- Factory Breakrooms
- Lake House



ACCESSORIES



10-4012

31-3108

10-5157

91104-0001


WARNING These systems are not designed for hazardous environments. Please consult factory for special options and requirements.



© Copyright 2026 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com

TOTAL DYNAMIC HEAD FLOW PER MINUTE

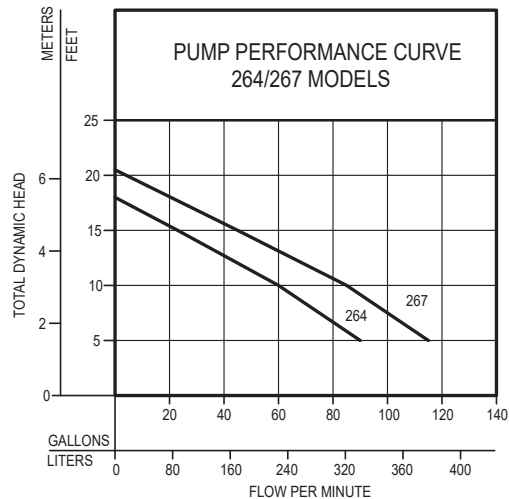


TOTAL DYNAMIC HEAD/FLOW
PER MINUTE
SEWAGE AND DEWATERING

MODELS		264		267	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	90	341	115	435
10	3.0	60	227	85	322
15	4.6	23	87	45	170
Shut-off Head:		18 ft.(5.5m)		20.5 ft.(6.2m)	

009969

Location	10' Stack	Simplex/Duplex	Basin	AFD	Vent	Basin Material	Float Switch	Pump HP	Alarm	Part Number
Indoor	No	Simplex	24" x 24"	Yes	2"	Poly	Integral	.4 HP	No	912-1141**
									Yes	912-1147
								.5 HP	No	912-1143**
									Yes	912-1149
							Piggyback	.4 HP	No	912-1142**
									Yes	912-1148
								.5 HP	No	912-1144**
									Yes	912-1150
			18" x 30"	No	2"	PSF	Integral	.4 HP	No	912-0007
									Yes	912-1007
							.5 HP	No	912-0010	
								Yes	912-1010	
					Piggyback	.4 HP	No	912-0005		
							Yes	912-1005		
						.5 HP	No	912-0017		
							Yes	912-1017		
		18" x 30"	Yes	2"	Poly	Integral	.5 HP	No	912-0070	
								Yes	912-0055	
						Piggyback	.4 HP	No	912-1055	
								Yes	912-1055	
				.5 HP	No	912-0056				
					Yes	912-1056				
				PSF	Integral	.4 HP	No	912-0086		
							Yes	912-1086		
.5 HP	No	912-0088								
	Yes	912-1088								
Piggyback	.4 HP	No	912-0087							
		Yes	912-1087							
	.5 HP	No	912-0089							
		Yes	912-1089							
Duplex	24" x 24"	Yes	2"	Poly	Integral	.5 HP	Yes***	912-1161		
Yes L.A. Code	Simplex	18" x 30"	No	2"	Fiber-glass	Piggyback	.4 HP	No	912-0016	
							.5 HP	No	912-0020	
Outdoor	No	Simplex	18" x 30"	No	NA	PSF	Integral	.4 HP	No	912-0082
									Yes	912-1082
								.5 HP	No	912-0084
									Yes	912-1084
							Piggyback	.4 HP	No	912-0083
									Yes	912-1083
								.5 HP	No	912-0085
									Yes	912-1085

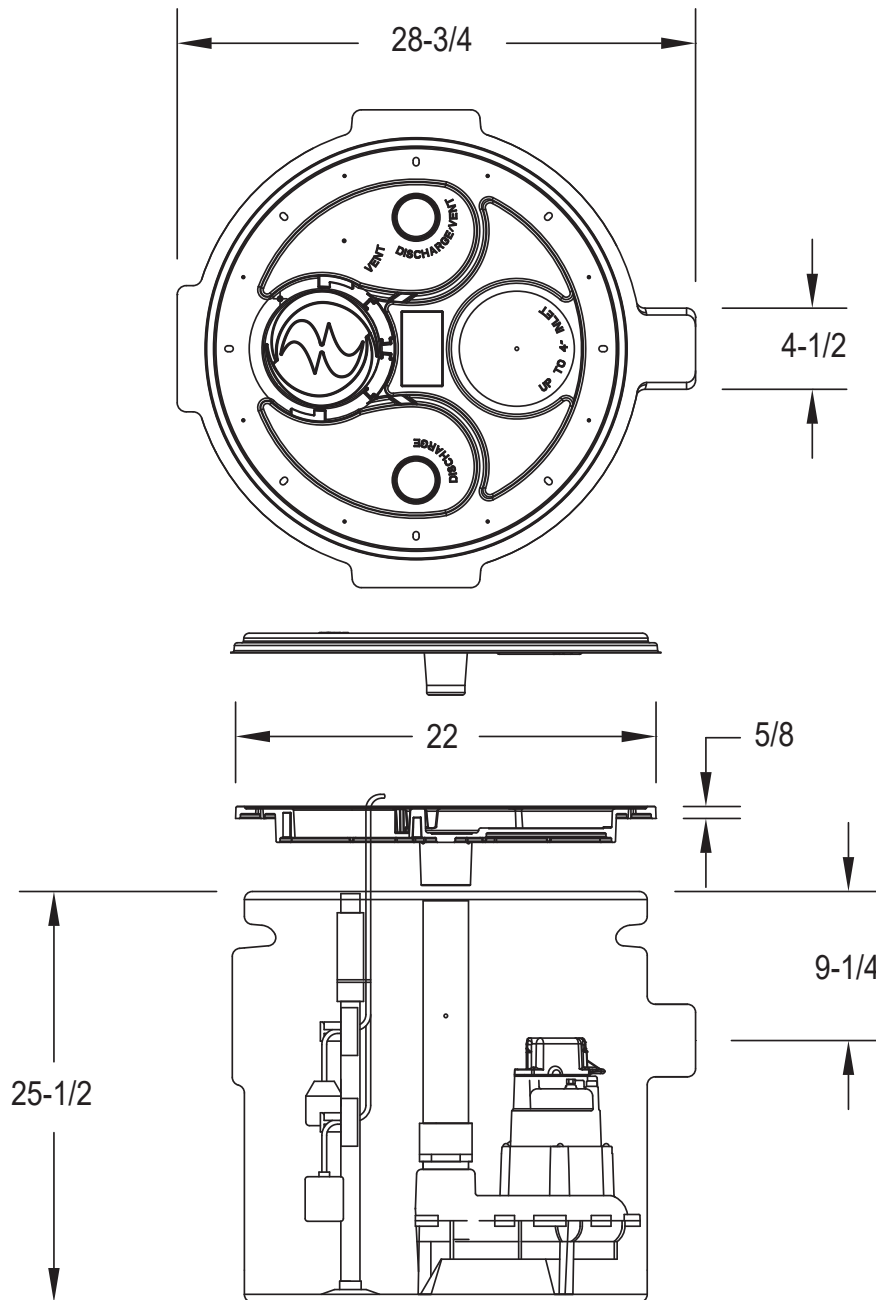

SK3308

24" x 24" (61 x 61 cm) shown, 18" x 30" (46 x 76 cm)
and 24" x 36" (61 x 91 cm) also available.

NOTES

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

SECTION: 2.45.054

FM3292

0826

Supersedes

1023