



ProPak 508-0015 shown

Battery Backup System

Self-testing, Z Control® enabled system provides convenience & confidence in your flood protection



COMPARE	Zoeller Aquanot Fit	ProSeries 2400	Liberty Storm Cell
GPM @ 10' @ 12.7 volts	34	23	29
Air lock prevention logic	YES	NO	NO
Built-in logic provides advance warning for many fault conditions	YES	NO	NO
Supervision of 2 independent switches, battery, and charger	YES	NO	NO
Included independent high water sensor that will send alarm and turn on pump in emergency	YES	NO	NO
Detect/Report many more conditions including blocked or frozen pipe	YES	NO	NO
Pre-assembled combo systems	YES, 3	YES, 3	YES,1
Built-in Wi-Fi	YES	NO*	YES
2 way cloud communication with configurable settings	YES	NO	NO
Device sharing with any other Z Control® account	YES	NO	NO
Unlimited notification & Maintenance reminders email/text/push	YES	NO	NO
Adjustable self-test schedule	YES	NO	NO
Manufacturer	Zoeller US / Canada	Others China	Others/Liberty US / Taiwan
Price	Lower	Higher	Even Higher

^{*}additional purchase required

SYSTEMS

Model	del System	
508-0014	Aquanot Fit 508	3 Years
508-0015	Aquanot Fit 508/53® Propak	3 Years
508-0016	Aquanot Fit 508/98 Propak	3 Years
508-0020	Aquanot Fit 508/63 Propak	5 YEARS!

PERFORMANCE

GALLONS PER MINUTE AT 12.7 VOLTS

FEET	METERS	GALLONS	LITERS
5	1.5	41	163
10	3.0	34	132
15	4.6	27	102
26	8.5	SHUT-OFF HEAD	

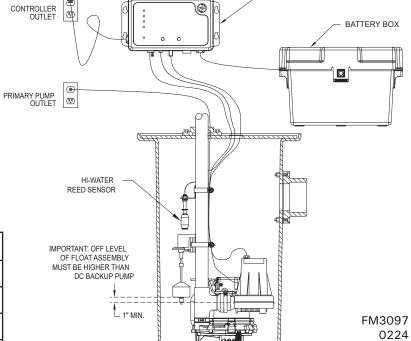


FIG. 1

 $\underline{\mathsf{DC}}\, \underline{\mathsf{PUMP}}\, \underline{\mathsf{INSTALLED}}\, \underline{\mathsf{IN}}\, \underline{\mathsf{LINE}}\, \underline{\mathsf{WITH}}\, \underline{\mathsf{SUBMERSIBLE}}\, \underline{\mathsf{PUMP}}$

AQUANOT FIT CONTROLLER

Supersedes

0123

CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).