



Preassembled
Grinder
Package
Systems



All cast iron grinder series for difficult residential applications where ejectors struggle.



Zoeller Family of Water Solutions™

Copyright Zoeller Co. All rights reserved.


Features

- Standard 18" x 30" (46 x 76 cm) polystructural foam or 24" x 24" (61 x 61 cm) poly basin (consult factory for more options)
- 1-1/4" discharge
- 803 - 1/2 HP 805 - 3/4 HP 807 - 1 HP
- 115 V and 230 V grinders for residential use without commercial costs
- Performance up to 55' TDH
- Proven Tri Slice® Cutter Technology

TOTAL DYNAMIC FLOW PER MINUTE

MODEL		803		805		807	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	35	132	40	151	45	170
10	3.0	31	117	37	140	42	159
20	6.1	22	83	29	110	35	132
30	9.1	9	34	20	76	27	102
40	12.2	--	--	8	30	18	68
50	15.2	--	--	--	--	7	26
Shut-off Head:		35 ft. (10.7 m)		45 ft. (13.7 m)		55 ft. (16.8 m)	

153604B

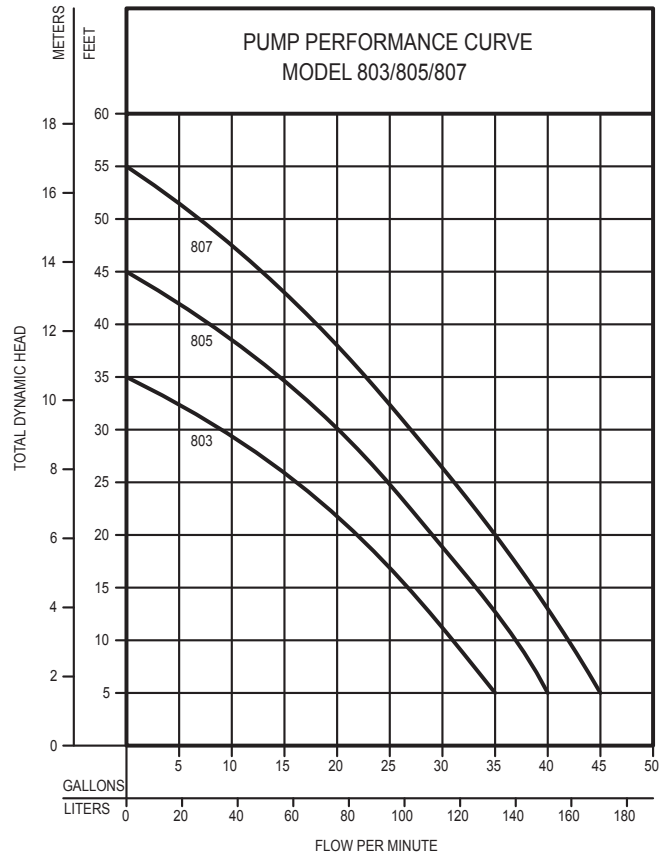

Description	Alarm (Yes / No)	Item #
Simplex, M803/Poly - Indoor, 24 x 24, 2" V, 1-1/4" Discharge	Yes	915-0038
Simplex, M803/PSF - Indoor, 18 x 30, 2" V, 1-1/4" Discharge	Yes	915-0039
Simplex, M805/Poly - Indoor, 24 x 24, 2" V, 1-1/4" Discharge	Yes	915-0040
Simplex, M805/PSF - Indoor, 18 x 30, 2" V, 1-1/4" Discharge	Yes	915-0041
Simplex, M807/Poly - Indoor, 24 x 24, 2" V, 1-1/4" Discharge	Yes	915-0042
Simplex, M807/PSF - Indoor, 18 x 30, 2" V, 1-1/4" Discharge	Yes	915-0043

115 V packages listed above

Consult factory for outdoor packages and other options.



10-4014 APak® Z Control®

Alarm Features

- High water alarm
- 2nd input for additional monitoring
- Z Control connected
- Free notifications via text, email & app
- More features: see FM2945



FM2953

0624

Supersedes

1223



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be CAUTION followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).