

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



INSTALLATION INSTRUCTIONS

FOR P/N 153813 AND 153814 RETROFIT RELAY ASSEMBLIES W/OMRON RELAY



IMPORTANT NOTICE:

This kit contains brackets to allow replacement of GE relay (parts 217092 & 217093) with new style relay in many different Zoeller pumps. In order to properly relace the relay, it is necessary to determine which retrofit bracket assembly is required.

RETROFIT RELAY BRACKET STANDARD AND EXPLOSION PROOF PUMPS.

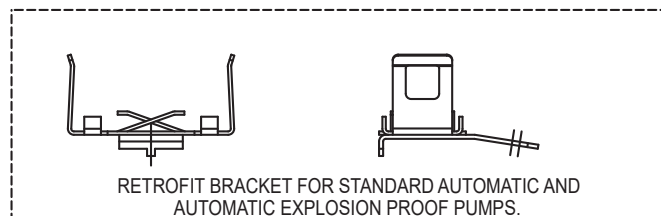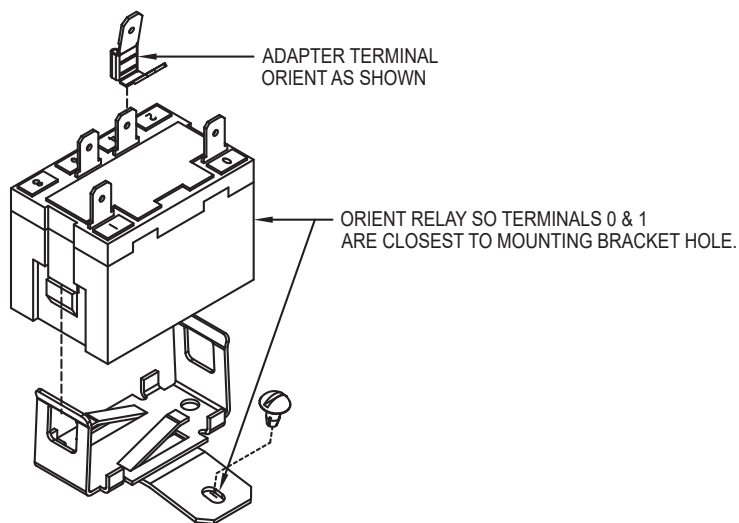

RETROFIT RELAY BRACKET HIGH TEMPERATURE PUMPS THRU 1/24.

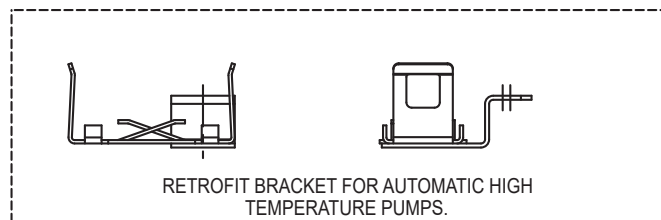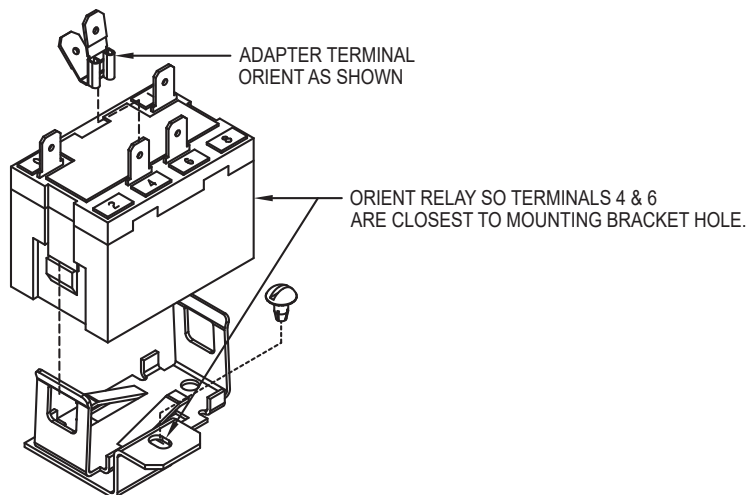

SK3094

Select the relay mounting bracket required based on pump model using drawings above as a guide. Snap relay into mounting bracket. Be sure relay tabs engage mounting bracket ears on both sides. Secure relay to housing with screw provided. Reconnect wires per wiring diagram available on service part sheet.

NOTE: Replacement relay terminal numbers do not match GE relay terminal numbers. SEE WIRING DIAGRAM.

INSTALLATION INSTRUCTIONS


FOR P/N 153813 AND 153814 RETROFIT RELAY ASSEMBLIES

W/PANASONIC RELAY


IMPORTANT NOTICE:

This kit contains brackets to allow replacement of GE relay (parts 217092 & 217093) with new style relay in many different Zoeller pumps. In order to properly relace the relay, it is necessary to determine which retrofit bracket assembly is required.

RETROFIT RELAY BRACKET STANDARD AND EXPLOSION PROOF PUMPS.

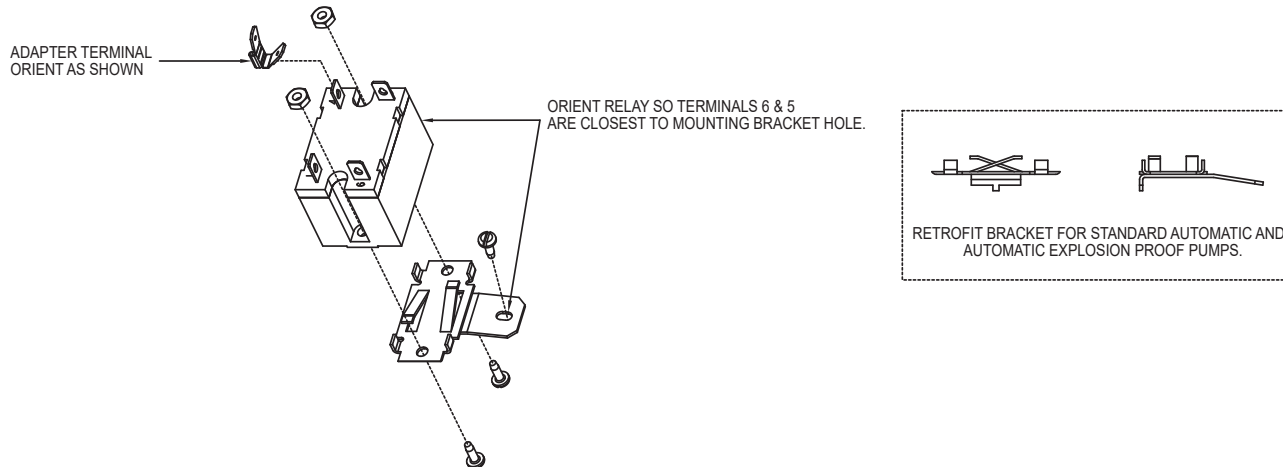

RETROFIT RELAY BRACKET HIGH TEMPERATURE PUMPS.


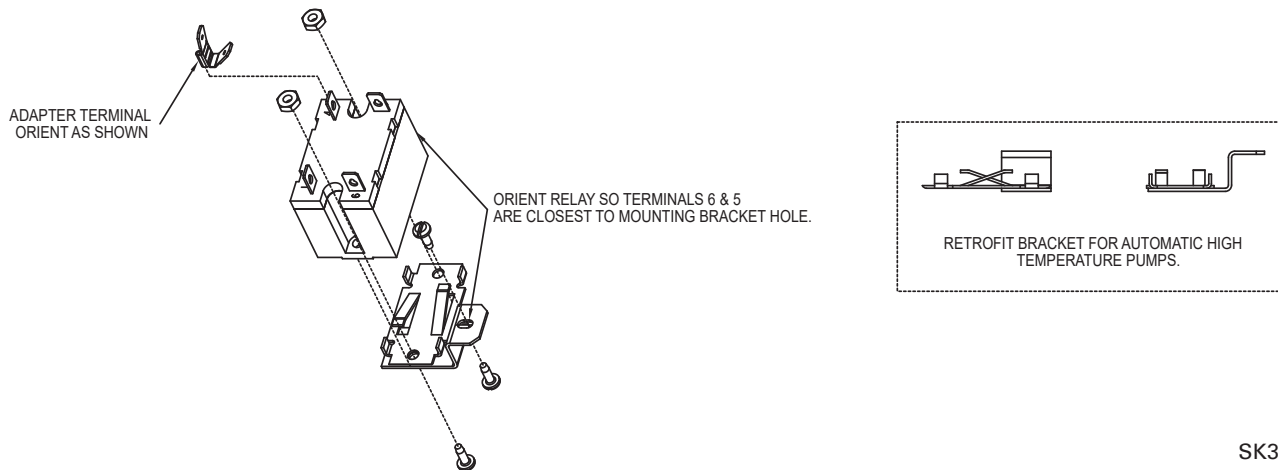


SK3384

Select the relay mounting bracket required based on pump model using drawings above as a guide. Relay does not snap into mounting bracket, it is secured to the bracket with screws and nuts. Secure relay to housing with screw provided. Reconnect wires per wiring diagram available on service part sheet.

NOTE: Replacement relay terminal numbers do not match GE relay terminal numbers. SEE WIRING DIAGRAM.

RELAY BRACKET HIGH TEMPERATURE PUMPS 2/24 THRU CURRENT.

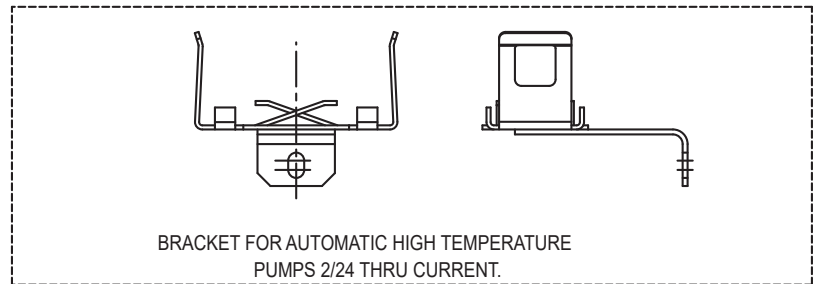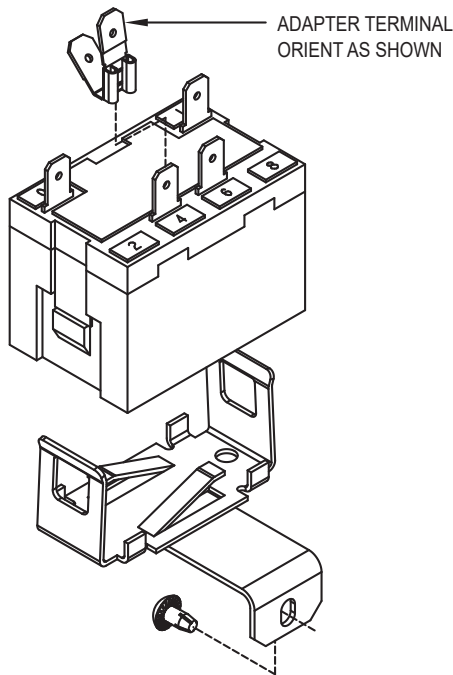

SK3094

Select the relay mounting bracket required based on pump model using drawings above as a guide. Snap relay into mounting bracket. Be sure relay tabs engage mounting bracket ears on both sides. Secure relay to housing with screw provided. Reconnect wires per wiring diagram available on service part sheet.

NOTE: Replacement relay terminal numbers do not match GE relay terminal numbers. SEE WIRING DIAGRAM.



MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
Tel: (502) 778-2731 • 1 (800) 928-PUMP

Trusted. Tested. Tough.®

Visit our website:
zoellerpumps.com