



ELEVATOR SYSTEMS

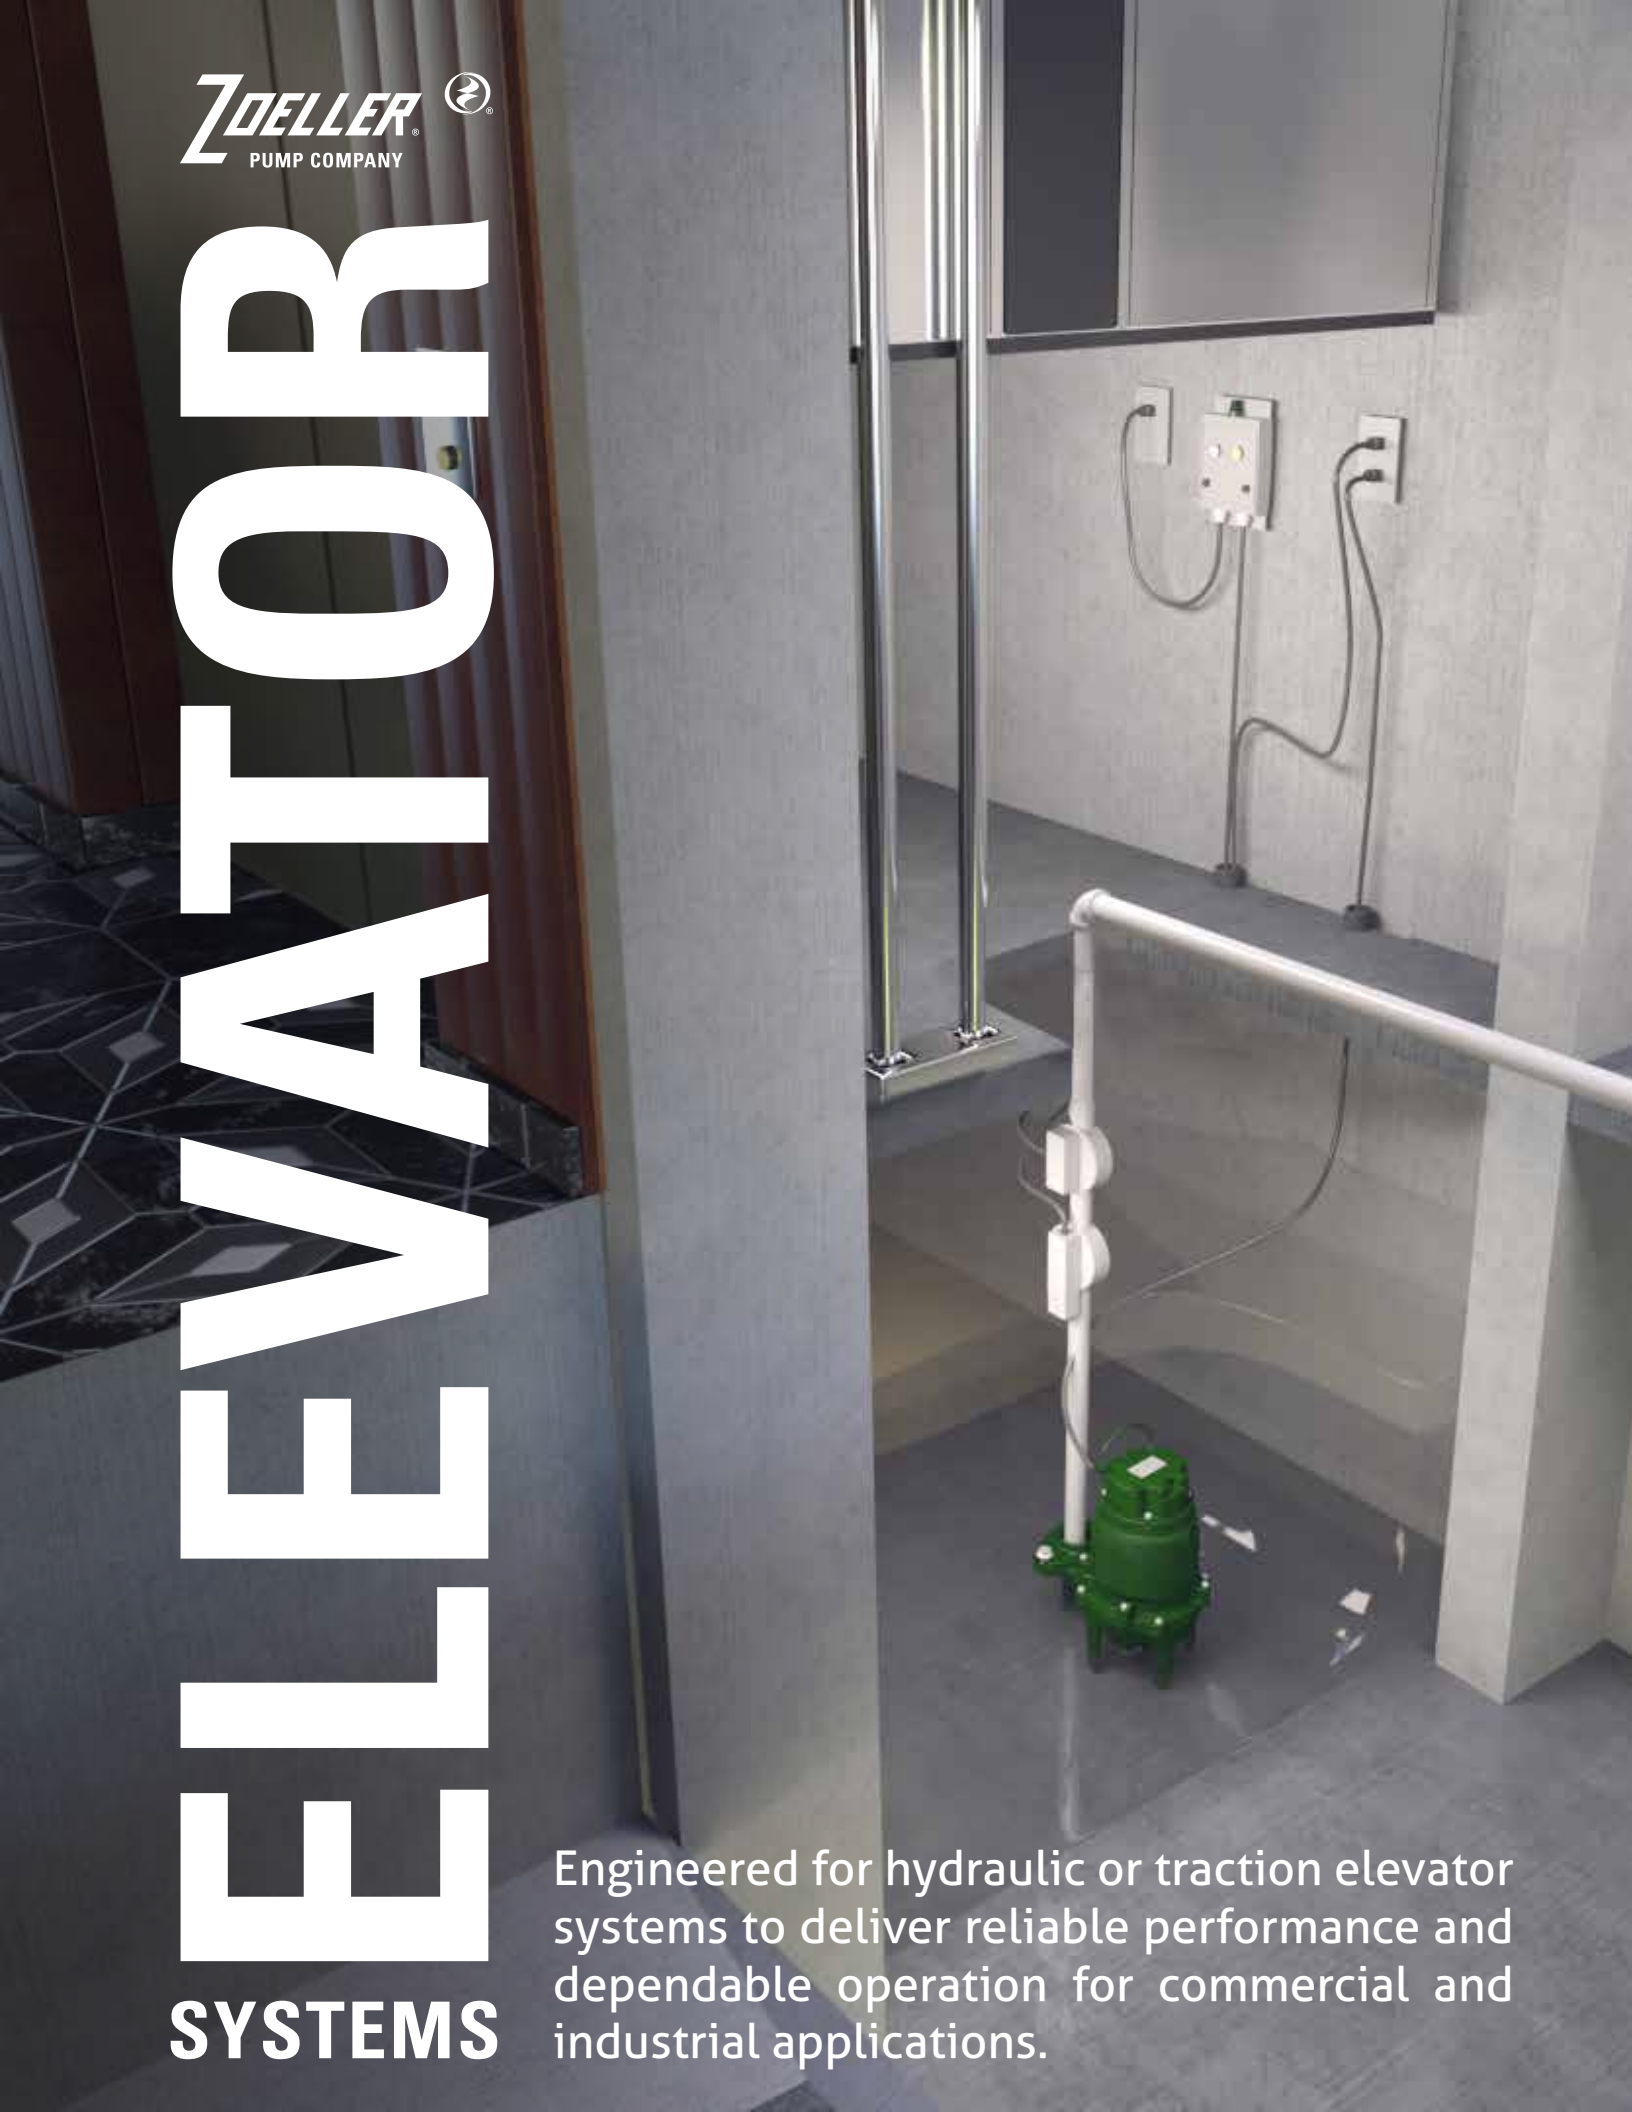

Engineered for hydraulic or traction elevator systems to deliver reliable performance and dependable operation for commercial and industrial applications.

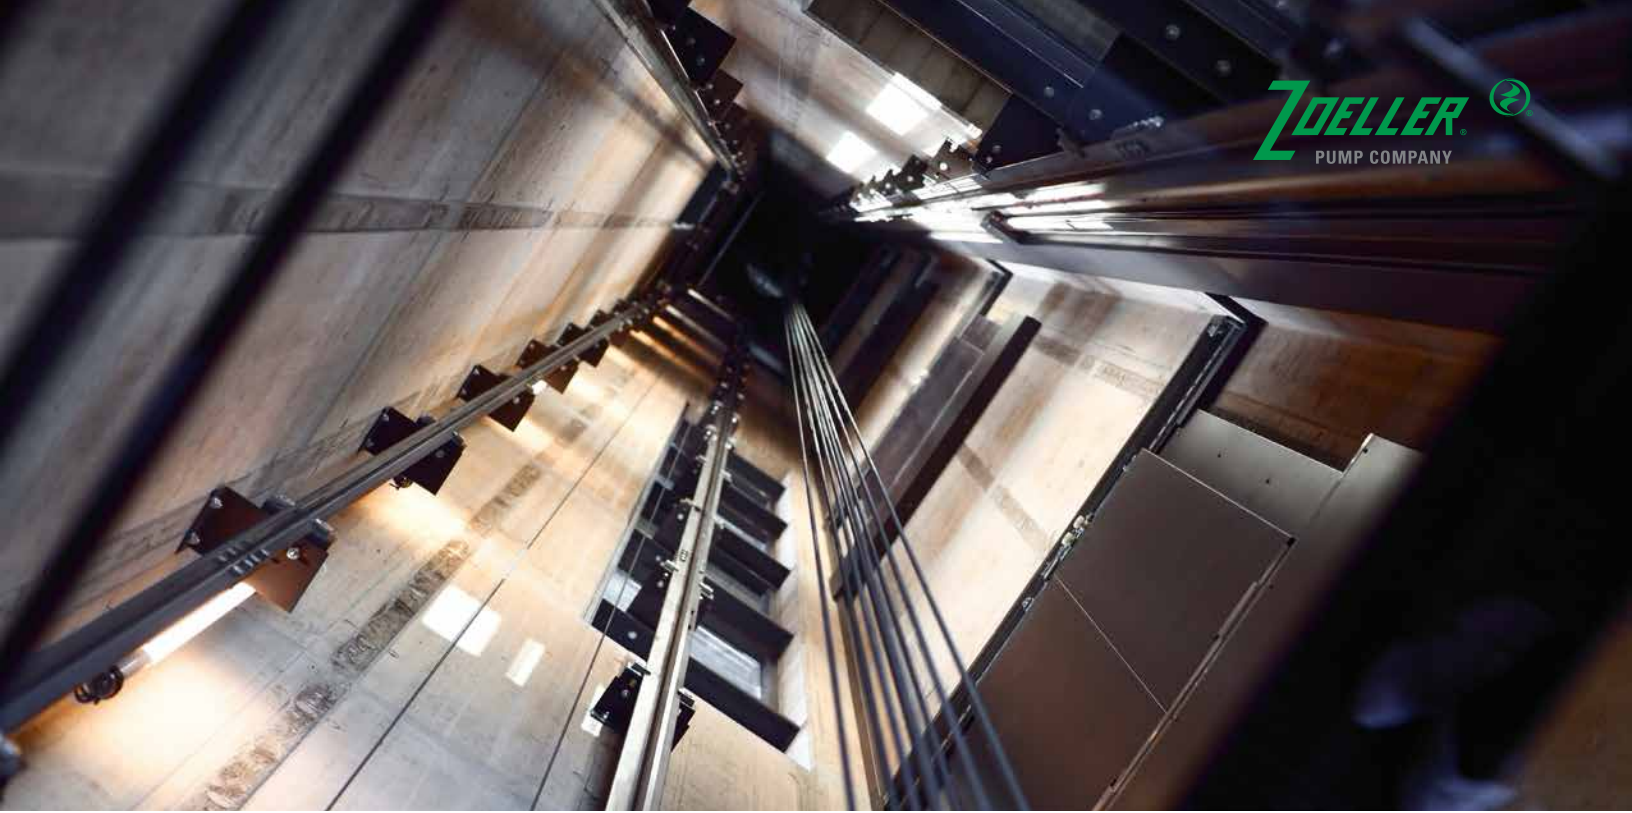

» WHICH SYSTEM DO I NEED?

ELEVATOR TYPE		HYDRAULIC		TRACTION
ZOELLER SYSTEM		Oil Guard®	Oil Guard® Separator	Traction Guard
MODEL NUMBER		940	942	945
PUMP AVAILABILITY	HP	.5 - 1.5	.5 - 1.5	.5 - 1.5
	VOLTS	115, 200, 230, 460	115, 200, 230	115, 200, 230, 460
	PHASE	1 and 3	1	1 and 3
RESPONSE WHEN OIL DETECTED		Only pumps water	Diverts oil to holding containment tank	Oil not present in traction elevator systems
ASME A17.1 COMPLIANT		Yes	Yes	Yes
ENVIRONMENTAL PROTECTION		Moderate	High	Low
MAINTENANCE NEEDS		Low	Moderate	Low

» MODEL COMPARISON

Pump Model	HP	Discharge	TDH (feet) @ 50 GPM (1 Car)	TDH (feet) @ 100 GPM (2 Car)	TDH (feet) @ 150 GPM (3 Car)
152	0.5	1-1/2"	16'	-	-
153	0.5	1-1/2"	21'	-	-
161	0.5	1-1/2"	36'	-	-
292	0.5	2"	30'	16'	-
284	1.0	2"	28'	21'	12'
294	1.5	2"	54'	40'	20'

» FOR MORE INFORMATION

See 940 Oil Guard FM3064, 942 Oil Guard Separator FM3604, 945 Traction Guard FM3591



Trusted. Tested. Tough.®

© Copyright Zoeller® Co. All rights reserved.

FM3601
0526
Supersedes
0526